

Single/Three-phase AC Intelligent Rs485 Interface Meter PDU.



AC Single-phase PDU Meter Header ,Dot matrix LCD display, Two-way temperature and humidity interface RS485 communication

- IEC Socket C13 & C19 (10 , 12 , 24,36 Socket outlet)
- 19" mounting ears • 3 x 1 mm² cable diameter,1.8 meter cable
- With MCB protection • (PDUs) can be mounted vertically or horizontally

Single-phase AC Intelligent Web Monitoring Meter PDU.



Single-phase AC Intelligent IP Meter Head Web Monitor ,LCD Colour Display Network,RS-485 Interface,Modbus RTU, SNMP v1,v2c Protocol

- IEC Socket C13 & C19 (10 , 12 , 24,36 Socket outlet)
- 19" mounting ears • 3 x 1 mm² cable diameter,1.8 meter cable
- With MCB protection • (PDUs) can be mounted vertically or horizontally

Network Metered PDU - Single / Three Phase



Single phase intelligent IP meter 220V AC 63A ,2-inch color screen display TCP/IP network port ,RS485 interface Temperature and humidity interface USB upgrade port

- IEC Socket C13 & C19 (10 , 12 , 24,36 Socket outlet)
- 19" mounting ears • 3 x 1 mm² cable diameter,1.8 meter cable
- With MCB protection • (PDUs) can be mounted vertically or horizontally

Metered by Outlet with Switching Rack PDU



Intelligent PDU Meter Header ,[Adapt to 1 Phase and 3 Phase] TFT color screen with full display angle,(2.0 inches), Ethernet port (1 way),IN OUT cascade port (1 way, Rs485 communication),6 RJ11 ports (sensors 4 inputs and 2 outputs), Hot-swappable port ,Input max current 63A, use CT Output port: 4-36 max current 16A/50A per port

- IEC Socket C13 & C19 (10 , 12 , 24,36 Socket outlet)
- 19" mounting ears • 3 x 1 mm² cable diameter,1.8 meter cable

Full Protected Metered Switching Rack PDU with Industrial Socket



Intelligent PDU Meter Header ,[Adapt to 1 Phase and 3 Phase] TFT color screen with full display angle,(2.0 inches),Ethernet port (1 way),IN OUT Ascade port (1 way, Rs485 communication),6 RJ11 ports (sensors 4 inputs and 2 outputs),Hot-swappable port ,Input max current 63A, indicator output Accuracy level: Grade 1. Arc Fault Detection Devices (AFDD) Surge Protector SPD AC 15KA~40KA

ON / OFF Monitoring Systems



PDU Monitoring Individual Socket ON / Off Monitoring Threshold Alarm The total load current/voltage threshold and the temperature/humidity threshold

19" Wide-16 Socket PDU




- Space saving — 1.2U rack mount design • First time 16 Socket in 19" PDU
- Placement in the rack — versions for horizontal (for 19" extrusions) I installation • IEC or NEMA outlet models • Over current Protection
- 16A / 32 A MCB Power Protection • Optional Surge Protector

Dual Feed PDU - Power Redundancy




- Space saving — 1.2U rack mount design • First time 16 Socket in 19" PDU
- Placement in the rack — versions for horizontal (for 19" extrusions) I installation • IEC or NEMA outlet models • Over current Protection
- 16A / 32 A MCB Power Protection • Optional Surge Protector

Inline Energy Meter RS 485 Interface

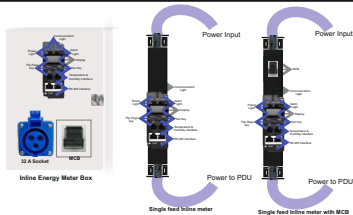

AC Single-phase PDU Meter Header, Dot matrix LCD display, Two-way temperature and humidity interface RS485 communication Voltage Range: AC 85-300V , Current Range AC 20mA-63A Power Supply: AC 220V

Single phase Inline intelligent IP meter

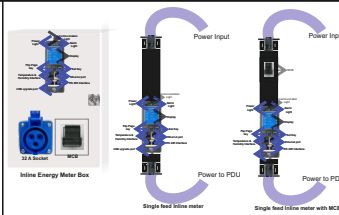

Single phase intelligent IP meter 220V AC 63A ,2-inch color screen display TCP/IP network port , RS485 interface Temperature and humidity interface USB Upgrade port

Universal Socket Meter Rs485 PDU



AC Single-phase PDU Meter Header ,Dot matrix LCD display, Two-way temperature and humidity interface RS485 communication

- Universal Socket (8 , 12 , 24,36 Socket outlet)
- 19" mounting ears • 3 x 1 mm² cable diameter,1.8 meter cable
- With MCB protection • (PDUs) can be mounted vertically or horizontally

Universal Socket Web Based Meter Rs485 PDU



Single-phase AC Intelligent IP Meter Head Web Monitor ,LCD Colour Display Network,RS-485 Interface,Modbus RTU, SNMP v1,v2c Protocol

- Universal Socket (8 , 12 , 24,36 Socket outlet)
- 19" mounting ears • 3 x 1 mm² cable diameter,1.8 meter cable
- With MCB protection • (PDUs) can be mounted vertically or horizontally

  	
C13 C14 250V 10 Amp Power Cord	
Connector (Female)	IEC 60320 C13
Plug (Male)	IEC 60320 C14
Wire Gauge	18 AWG
Conductors / Outer jacket	3 wire SJT PVC
Copper Wire Stranding	Stranding 40 strands
Temperature Rating	Up to 105°C
Wire Outer Diameter	8 mm
Current / Voltage Rating	10 A Up to 250 Volts AC

  	
C15 C14 250V 16 Amp Power Cord	
Connector (Female)	IEC 60320 C15
Plug (Male)	IEC 60320 C14
Wire Gauge	14 AWG
Conductors / Outer jacket	3 wire SJT PVC
Copper Wire Stranding	65 strands
Temperature Rating	Up to 105°C
Wire Outer Diameter	11 mm
Current / Voltage Rating	16 A Up to 250 Volts AC

  	
C19 C20 250V 16 Amp Power Cord	
Connector (Female)	IEC 60320 C19
Plug (Male)	IEC 60320 C20
Wire Gauge	14 AWG
Conductors / Outer jacket	3 wire SJT PVC
Copper Wire Stranding	65 strands
Temperature Rating	Up to 105°C
Wire Outer Diameter	11 mm
Current / Voltage Rating	16 A Up to 250 Volts AC

			
C13 C19 Ind. Socket with 3pin Plug 250V Power Cord			
Connector (Female)	IEC 60320 C13	IEC 60320 C19	IEC 60309 Socket
Plug (Male)	3pin 10A plug	3pin15A.Plug	
Wire Gauge	18 AWG	14 AWG	
Conductors / Outer jacket	3 wire SJT	PVC	
Copper Wire Stranding	40 strands	65 strands	
Temperature Rating	Up to 80°C		
Wire Outer Diameter	8 mm	11 mm	
Current / Voltage Rating	10 A	16 A	Up to 250 Volts AC

Full loaded Patch Panel 		1U Multimedia Keystone Blank Patch Panel  Premium CAT5E, CAT6, CAT6A Blank Patch Panel Reinforced steel with pre-numbered ports Ethernet 16-Ports (1U)	
1U Multimedia Keystone Blank Patch Panel Module Based  Module: D-link RJ45 Cat6 IO / Digisole RJ45 Cat6 IO Keystone RJ45 CAT 6 I/O Module :Molex RJ45 CAT 6 I/O		Dual system Panel Copper & Fiber  Cat6 Patch Panel Fiber Patch Panel	